

D20

SECTIONAL VALVE



 **walvoil**
MOTION BY PEOPLE

TECHNICAL CATALOGUE

A member of



 **walvoil**
MOTION BY PEOPLE

3rd edition Jan.2024

Additional information

*This catalogue shows the product in the most standard configurations.
Please contact Sales Dpt. for more detailed information or special request.*

WARNING!

*All specifications of this catalogue refer to the standard product at this date.
Walvoil, oriented to a continuous improvement, reserves the right to
discontinue, modify or revise the specifications, without notice.*

*WALVOIL IS NOT RESPONSIBLE FOR ANY DAMAGE CAUSED BY AN
INCORRECT USE OF THE PRODUCT.*



Applications

The valve is available with manual, hydraulic remote, pneumatic and electrohydraulic controls.

Working sections have auxiliary valves and a broad range of interchangeable spools.

Special versions for LS variable pumps can be realised on request.

Suitable for applications including Wheel loaders, Truck cranes, Drilling machines, Sea platform cranes, Presses, Compactor, Hook and Skip loaders.





QUICK REFERENCE GUIDE

GENERAL SPECIFICATION	D9	D3M	DVS10	D4	D6	D16	D12	DVS20	D20	D25	D40
Working sections number	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-12	1-10
CIRCUIT											
Parallel	•	•	•	•	•	•	•	•	•	•	•
Series	•	•	•	•	•	•	•		•	•	
Tandem	•	•	•	•	•	•		•	•		
Parallel circuit stroke (mm)	6	5	6	6	7	7	9,5	9,5	9,5	12	15
Series circuit stroke (mm)	6	5	6	6	5	7	6,5		6,5	8,5	
Float spool extra stroke (mm)	5	5	5	5,5	6	7	7	7	7	9,5	10
Spools pitch (mm)	31	38	35	40	46	46	56	56	64	75	91
RATED FLOW											
Max recommended flow rate (l/min)	35	55	45	80	100	150	180	250	250	380	700
Max recommended flow rate (GPM)	10	15	12	22	27	40	48	67	67	100	185
RATED PRESSURE											
Max working pressure (bar)*	315	350	350	350	315	350	350	250	350	350	350
Max working pressure (PSI)*	4500	5000	5000	5000	4500	5000	5000	4000	5000	5000	5000
NOTE (*): Intermittent pressure at max. 1 million cycles with specific internal testing.											
OPTION CHART	D9	D3M	DVS10	D4	D6	D16	D12	DVS20	D20	D25	D40
Direct acting pressure relief valve	•	•	•	•							
Pilot operated pressure relief valve	•		•	•	•	•	•	•	•	•	•
2 stage pilot operated relief valve	•		•	•	•	•	•		•	•	•
Externally piloted valve	•	•	•	•	•	•	•		•	•	•
Solenoid dump valve (12 Vdc)	•	•	•	•	•	•	•				
Solenoid dump valve (24 Vdc)	•	•	•	•	•	•	•				
Main anticavitation check valve	•		•	•	•	•	•	•	•	•	•
Clamping valve	•		•								
SPOOL ACTUATION											
Manual control	•	•	•	•	•	•	•	•	•	•	•
Without lever	•	•	•	•	•	•	•	•	•	•	•
90° joystick control	•	•	•	•	•	•					
Hydraulic control	•	•	•	•	•	•	•	•	•	•	•
Direct electric control (12-24 Vdc)	•		•								
SPOOL RETURN ACTION											
Spring return	•	•	•	•	•	•	•	•	•	•	•
Detent in A - in B - in A/B	•	•	•	•	•	•	•	•	•	•	•
Detent in 4 th position	•	•	•	•	•	•	•	•	•	•	•
Arrangement for dual control	•	•		•	•	•	•				
Hydraulic load limit	•	•		•	•	•					
Pneumatic control ON - OFF	•	•	•	•	•	•	•	•	•		
Proportional pneumatic control	•	•	•	•	•	•	•	•	•		
Electrical load limit	•	•		•	•	•					
Electrohydraulic control ON-OFF (12-24 Vdc)	•	•	•	•	•	•	•	•	•		
Electrohydraulic control PROP. (12-24 Vdc)	•	•	•	•	•	•	•	•	•		
Electropneumatic control (12-24 Vdc)	•	•	•	•	•	•	•				
AUXILIARY VALVES											
Antishock valve	•	•	•	•	•	•	•	•	•	•	•
Anticavitation valve	•	•	•	•	•	•	•	•	•	•	•
Combined valve	•	•	•		•	•	•		•	•	•
Pilot combined valve							•	•	•	•	•



GENERAL INDEX

4	General specifications Standard working conditions Fluid options
5	Order example Standard thread Thread codes Tie-rod kit classification Painting
7	Dimensions
8	Typical curves Pressure drop (P - T) Pressure drop (P - A/B) Pressure drop (A/B - T) Direct relief valve curve Combined valve curve Antishock valve curve Anticavitation check valve curve
10	Inlet Section Order example Inlet side classification Valve identification Valve arrangement Inlet position and available thread type
14	Working section Order example Spool identification Spool actuation classification for manual control Spool actuation classification for hydraulic control Spool return action classification - Spring load values Work section identification Auxiliary valves identification
25	Intermediate inlet section Order example Intermediate inlet section classification Valve identification on intermediate inlet section Valve arrangement on intermediate inlet section Inlet position and available thread type
29	Intermediate outlet section Order example Intermediate outlet section classification Inlet position and available thread type (for BF intermediate) Inlet position and available thread type (for BG intermediate)
32	Outlet section (version 1 outlet) Order example
32	Outlet section (HPCO version outlet) Order example - HPCO version outlet Outlet with single tank classification Outlet with two tanks classification Carry-over connection (HPCO)
36	D20 Spare parts list Gasket kits
39	Installation and maintenance
41	General conditions and patents



GENERAL SPECIFICATIONS

Standard working conditions

Description	Value
Ambient operating temperature range	-40°C / +60°C
Kinematic viscosity range	10 ÷ 300 cSt
Max contamination level	9 (NAS 1638) - 20/18/15 (ISO 4406:1999)
Recommended filtration level	b10 > 75 (ISO 16889:2008)
Internal filter (on electroproportional valves pilot line)	30 µm

All information and diagrams in this catalogue refer to a mineral base oil VG46 at 50°C temperature (32 cSt kinematic viscosity)

Fluid options

Types of fluid (according to ISO 6743/4) Oil and Solutions	Temperature (°C)		Compatible gasket
	min	max	
Mineral Oil HL, HM (or HLP acc. to DIN 51524)	-25	+80	NBR
Oil in water emulsions HFA	+5	+55	NBR
Water in oil emulsions HFB	+5	+55	NBR
Polyglycol-based aqueous solution HFC	-10	+60	NBR

For special applications and different fluids, please call our Technical Department.

**ORDER EXAMPLE**

D20/1: IR 009 150 A G06 | W001A H005 RP G06 01 PA 100 01 PB 100 | TJ A G07

TYPE: _____

D20: product type

/1: working section number

1) INLET ARRANGEMENT: pag. 10

IR 009 inlet side and valve type

150 setting (bar)

A G06 inlet position and available thread type

2) WORK SECTION ARRANGEMENT: pag. 14

W001A spool type

H005 spool actuation type

RP G06 type and thread section

01 PA 100 auxiliary valve (port A)


01 PB 100 auxiliary valve (port B)

3) OUTLET ARRANGEMENT: pag. 32

TJ outlet type

A G07 outlet position and available thread type

Ordering row 2 must be repeated for every work section

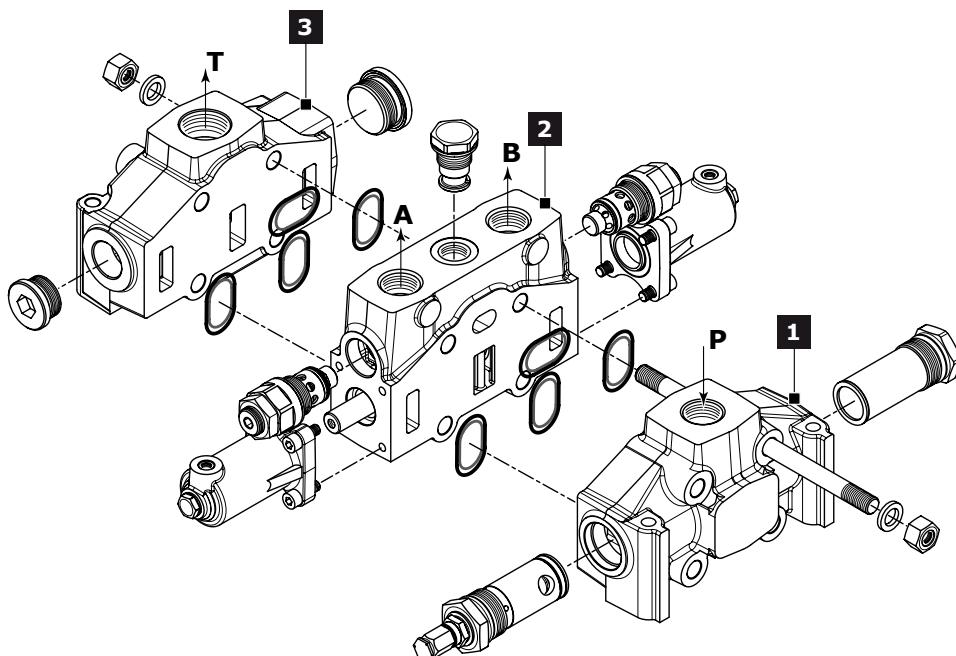**Standard thread**


The connection ports size is indicated by an ordering code common for all Hydrocontrol products. Following table shows all available connections; for ordering code refer to table on page 40.

ports	BSP (ISO-228)		UN-UNF (ISO-725)		SAE 3000 (ISO 6162-1)		SAE 6000 (ISO 6162-6)	
Inlet Port (P)	G 1 - G 1 1/4	G06-G07	1"5/16 - 12 UNF	U06	1" MA - 1" UNC	S05-S06	3/4" MA - 3/4" UNC	S33-S34
Ports (A - B)	G 1 - G 1 1/4	G06-G07	1"5/16 - 12 UNF	U06	1" MA - 1" UNC	S05-S06	3/4" MA - 3/4" UNC	S33-S34
Outlet (T)	G 1"1/4	G07	1"5/16 - 12 UNF	U06	1"1/4 MA - 1"1/4 UNC	S07-S08	-	
Carry over (HPCO)	G 1"1/4	G07	1"5/8 - 12 UNF	U07	1"1/4 MA - 1"1/4 UNC	S07-S08	1" MA - 1" UNC	S35-S36
Hydraulic Pilot	G 1/4	G02	9/16" - 18 UNF	U02	-		-	
Pneumatic Pilot	G 1/8		NPTF 1/8-27					



Tie-rod kit classification (appendix "A")

Tie rod kit allows the correct assembly of sectional valves. Tie rod's length depends on the number of sections; each valve is assembled with tie rod kits including a tie rod, two nuts and two washers. D20 requires 4 tie-rod kits.

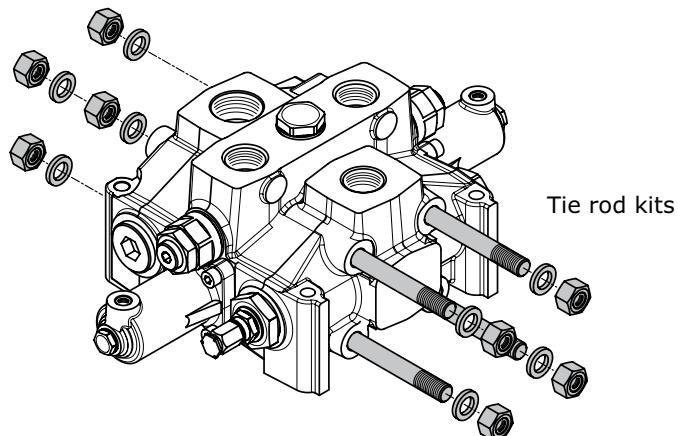

Tie rod kit	Order Code	Lenght (mm)	Clamping Torque (Nm)	Quantity
D20/1	300108001	248	110	4
D20/2	300108002	312		
D20/3	300108003	376		
D20/4	300108004	440		
D20/5	300108005	504		
D20/6	300108006	568		
D20/7	300108007	632		
D20/8	300108008	696		
D20/9	300108009	760		
D20/10	300108010	824		
D20/11	300108011	888		
D20/12	300108012	952		

Painting

On request, all Hydrocontrol valves can be delivered painted (RAL 9005 black primer).

Order example of D20/1 painted:

D20/1
IR 009 150 A G06
W001A H001 F001A RP G06 01 PA 100 01 PB 100
TJ A G07
P006/1 N10

The painting is indicated with the following value:

P006 - /1 - N10


Color black
section number
Painted



D20 ■ SECTIONAL VALVE

walvoil
MOTORS BY PEOPLE

DIMENSIONS

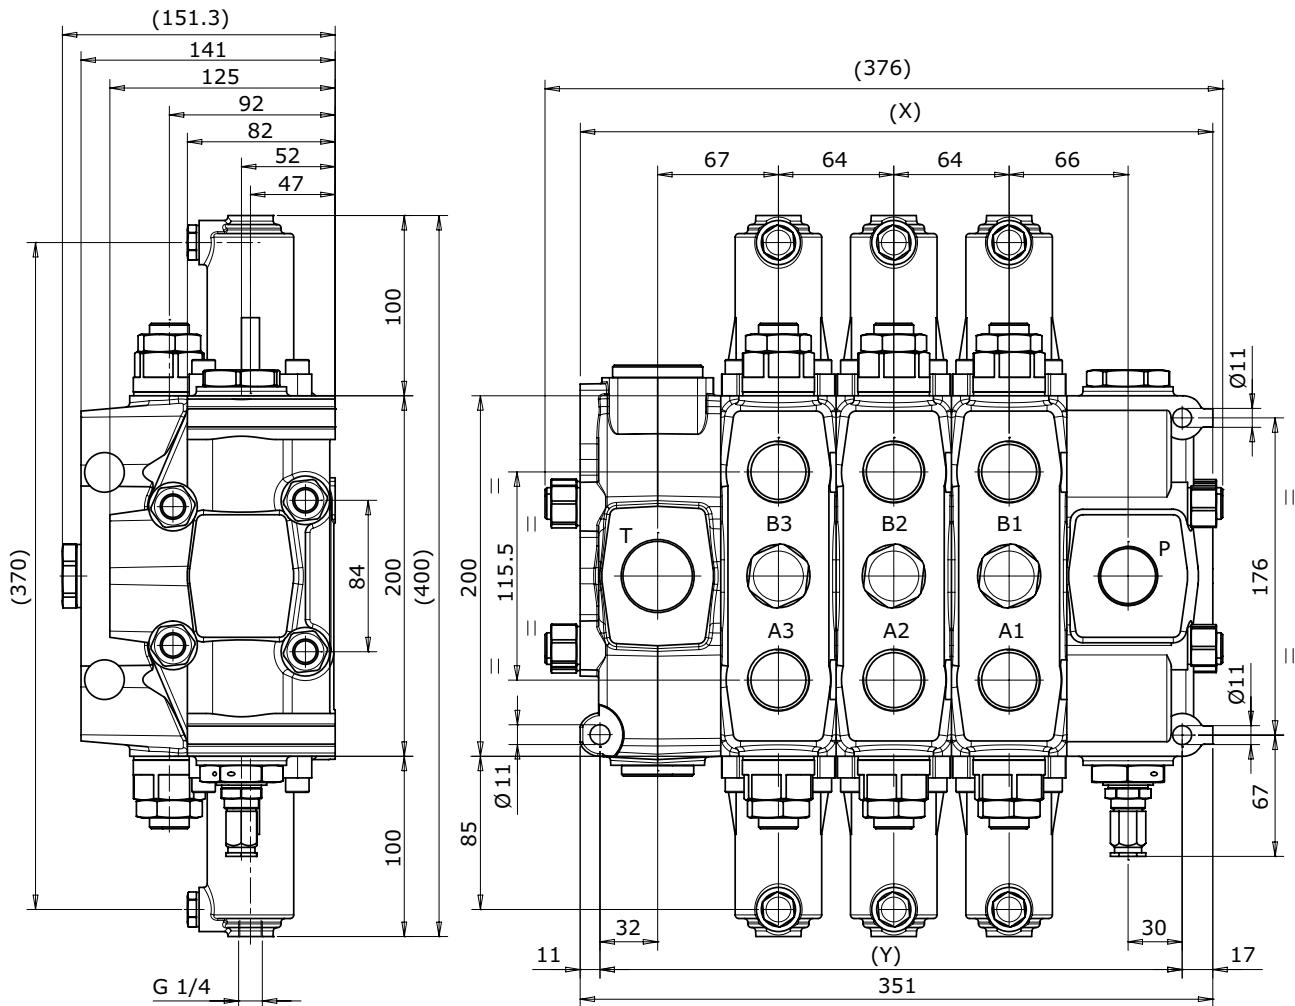



TYPE	/1	/2	/3	/4	/5	/6	/7	/8	/9	/10	/11	/12
X (mm)	195	259	323	387	451	515	579	643	707	771	835	899
Y (mm)	223	287	351	415	479	543	607	671	735	799	863	927
Weights (kg)	28,6	39,6	50,6	61,6	72,6	83,6	94,6	105,5	116,4	127,4	138,4	149,4





TYPICAL CURVES

Indicated values have been tested with standard sectional valve and W001A spool.



Pressure drop (P - T)

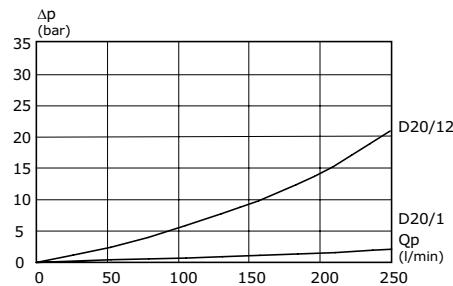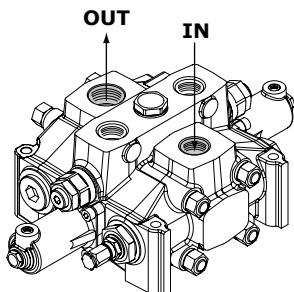

Pressure drop (P - A/B)

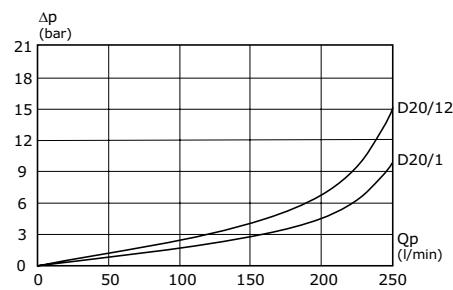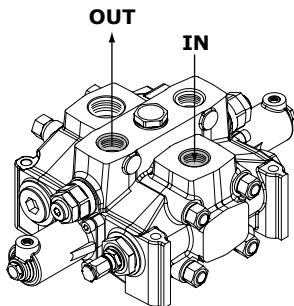


Pressure drop (A/B - T)

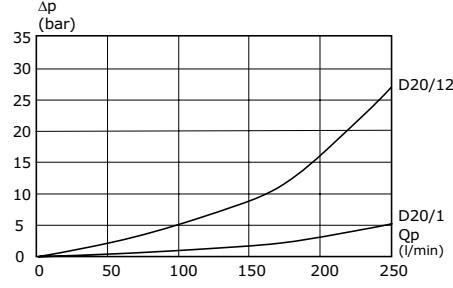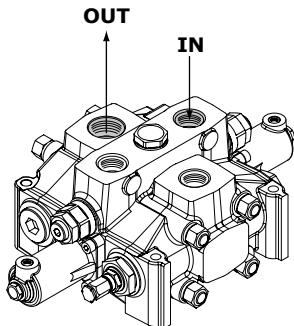

Pilot operated relief valve curve

Setting ranges	
type	pressure (bar)
A	0 - 350

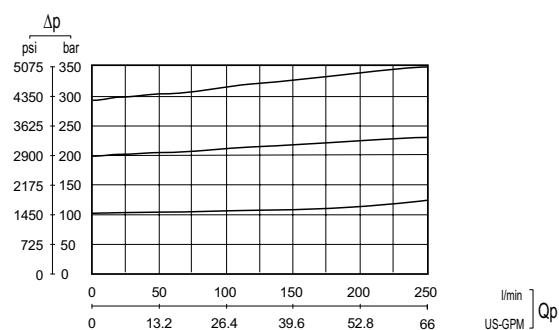



TYPICAL CURVES




Indicated values have been tested with standard sectional valve and W001A spool.

Antishock valve curve

type	Setting ranges	
	pressure (bar)	
	at full flow	at min. flow
A	0 - 70	0-A / 50-A
A	71 - 120	51-A / 70-A
B	121 - 150	71-A / 110-A
C	151 - 300	111-A / 240-A
D	301 - 350	241-A / 350-A

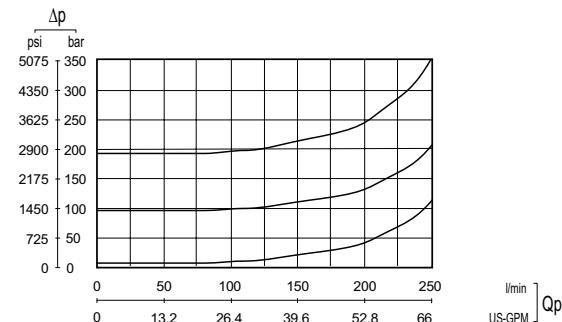
Combined valve curve

type	Setting ranges	
	pressure (bar)	
	at full flow	at min. flow
A	50 - 130	20-A / 100-A
B	131 - 220	101-A / 220-A
C	221 - 260	221-A / 350-A

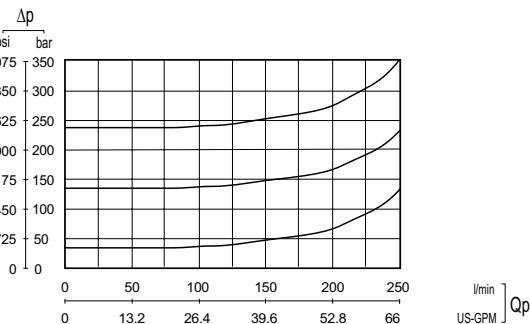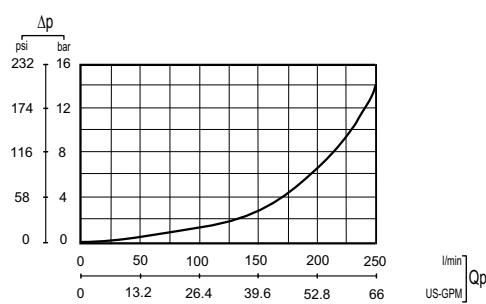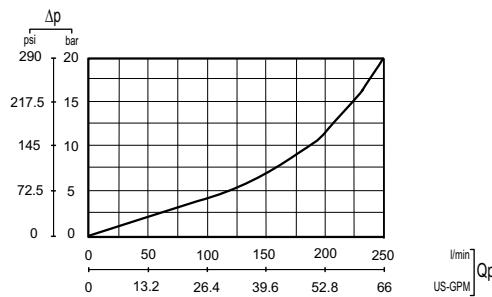

Main anticavitation check valve curve

Anticavitation check valve curve




INLET SECTION

Order example

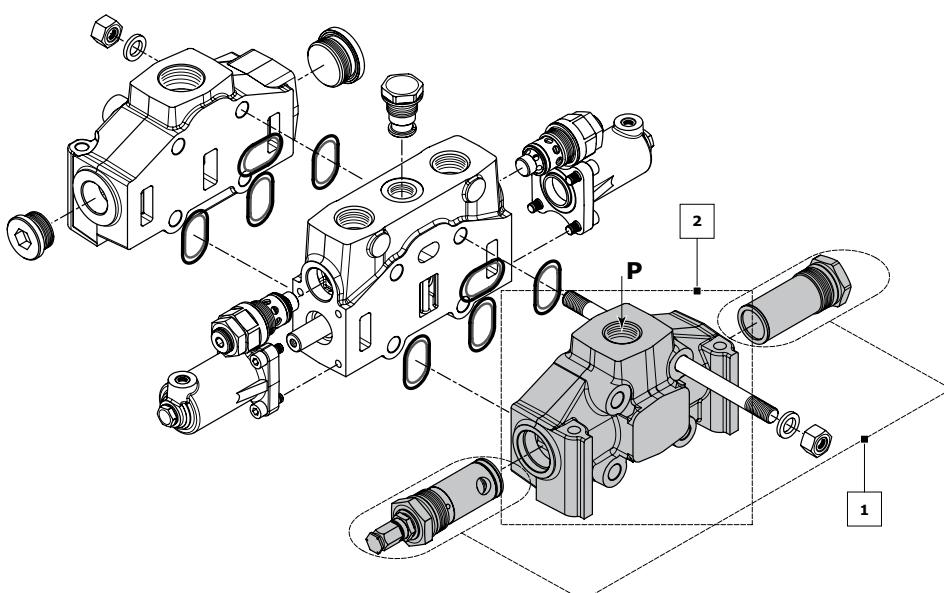
		IR	009	150	A G05
1.	IR	inlet side classification			
1.	009	valve arrangement			
1.	150	setting (bar)			
2.	A G06	inlet position and available thread type			





Rif.	Code	Description	Page
-	IR	Sectional valve with right inlet section	11
	IL	Sectional valve with left inlet section	
1	009	Pilot operated pressure relief valve	
1	010	Pilot operated pressure relief valve and Main anticavitation check valve	12
1	019	Without valves	
2	A G06	Upper inlet (thread G 1")	
2	A G07	Upper inlet (thread G 1 1/4")	
2	A U07	Upper inlet (thread 1 5/8 - 12 UNF)	13
2	A S05	Upper inlet (thread SAE 3000 1" MA)	
2	A S33	Upper inlet (thread SAE 6000 3/4" MA)	

NOTE: when ordering a relief valve it is necessary to specify factory setting (example 150).


Inlet side classifications

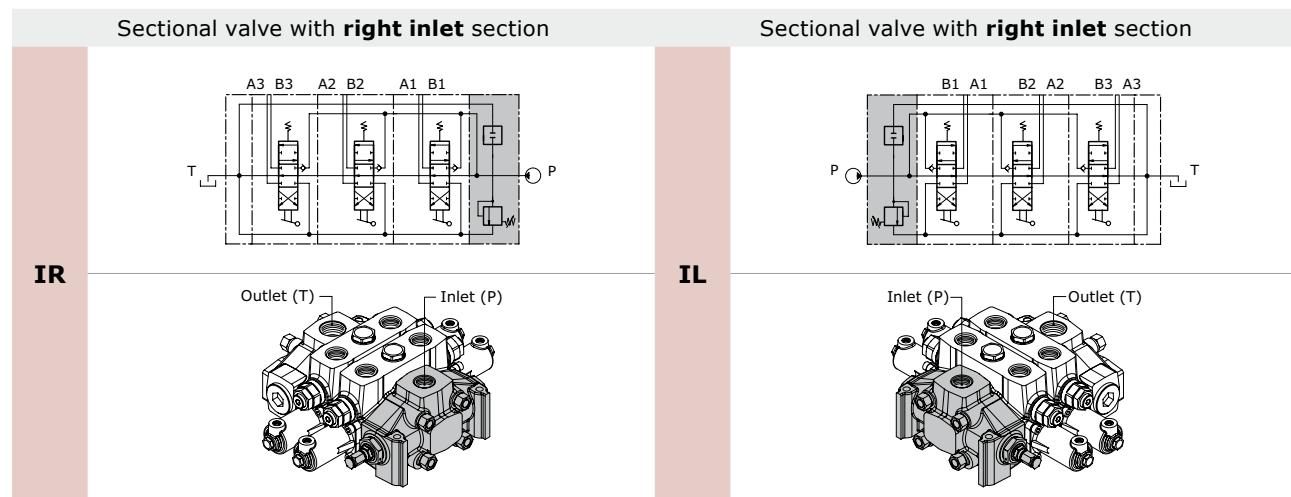

Valve identification

type	schema	layout	description	type	schema	layout	description
2			Pilot operated pressure relief valve	5			2 stage pilot operated relief valve
3			Relief valve plugged	6			Externally piloted valve
4			Main anticavitation check valve	11			Plug with pressure-gauge connection

Valve arrangement

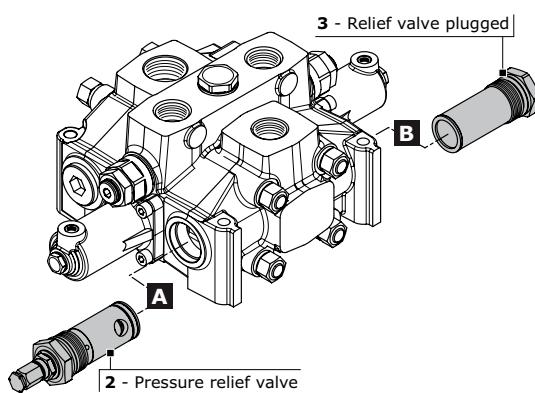

Combination valve example: 009 = 2A - 3B

009 Combination valve
2A Pressure relief valve in port A
3B Relief valve plugged in port B

The code identifies:
with a number, the type of valve; with a letter its position on the inlet section.

(A) = spool action side
(B) = spool return action side

NOTE: when ordering a main relief valve it is necessary to specify setting



VALVE COMBINATION INLET SECTION	Valve type on port B					
2	009	010		011	016	
3	018	019	020	021	022	027
4	029	030		031	032	037
5		038				
6	047	048				
11	085					





NOTE: Valve combinations 021, and 038 requires double setting (see example).

Order example for inlet section: IR **038 200*280 A G05**

**038
200*380**

valve combination _____
double range setting (bar) _____

**Inlet combination and thread available**

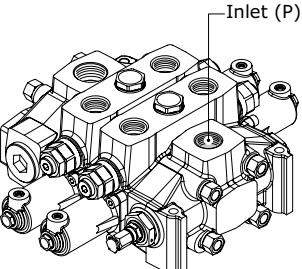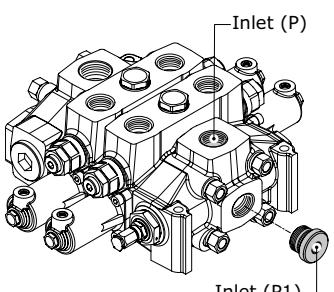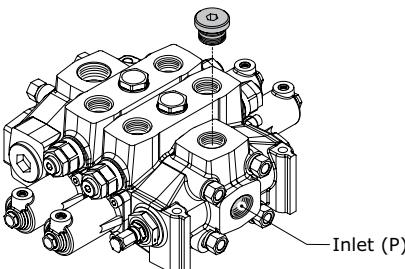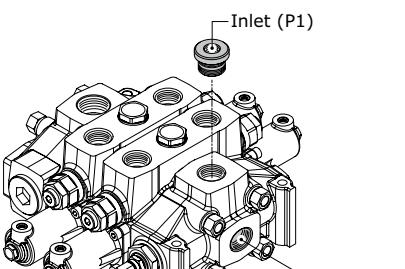
A G06		Upper inlet (thread G 1)
A G07		Upper inlet (thread G 1 1/4)
A U07		Upper inlet (thread 1 5/8 - 12 UNF)
A S05		Upper inlet (thread SAE 3000 - 1" MA)
A S06		Upper inlet (thread SAE 3000 - 1" UNC)
A S33		Upper inlet (thread SAE 6000 - 3/4" MA)
A S34		Upper inlet (thread SAE 6000 - 3/4" UNC)
B G06		Upper inlet P1 with pressure-gauge connection G 1/4 (thread G 1)
B G07		Upper inlet P1 with pressure-gauge connection G 1/4 (thread G 1 1/4)
B U07		Upper inlet P1 with pressure-gauge connection G 1/4 (thread 1 5/8 - 12 UNF)
B S05		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" MA)
B S06		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" UNC)
B S33		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" MA)
B S34		Upper inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" UNC)
C G06		Central side inlet (thread G 1)
C G07		Central side inlet (thread G 1 1/4)
C U07		Central side inlet (thread 1 5/8 - 12 UNF)
C S05		Central side inlet (thread SAE 3000 - 1" MA)
C S06		Central side inlet (thread SAE 3000 - 1" UNC)
C S33		Central side inlet (thread SAE 6000 - 3/4" MA)
C S34		Central side inlet (thread SAE 6000 - 3/4" UNC)
D G06		Central side inlet P1 with pressure-gauge connection G 1/4 (thread G 1)
D G07		Central side inlet P1 with pressure-gauge connection G 1/4 (thread G 1 1/4)
D U07		Central side inlet P1 with pressure-gauge connection G 1/4 (thread 1 5/8 - 12 UNF)
D S05		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" MA)
D S06		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 3000 - 1" UNC)
D S33		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" MA)
D S34		Central side inlet P1 with pressure-gauge connection G 1/4 (thread SAE 6000 - 3/4" UNC)



WORKING SECTION

Order example:

	W001A	H005	RP G06	01 PA 100	01 PB 100
1.	W001A	spool type			
2.	H005	spool actuation type			
3.	RP G06	section and thread type			
4.	01 PA 100	auxiliaty valve (port A - handle side)			
5.	01 PB 100	auxiliaty valve (port B - cap side)			

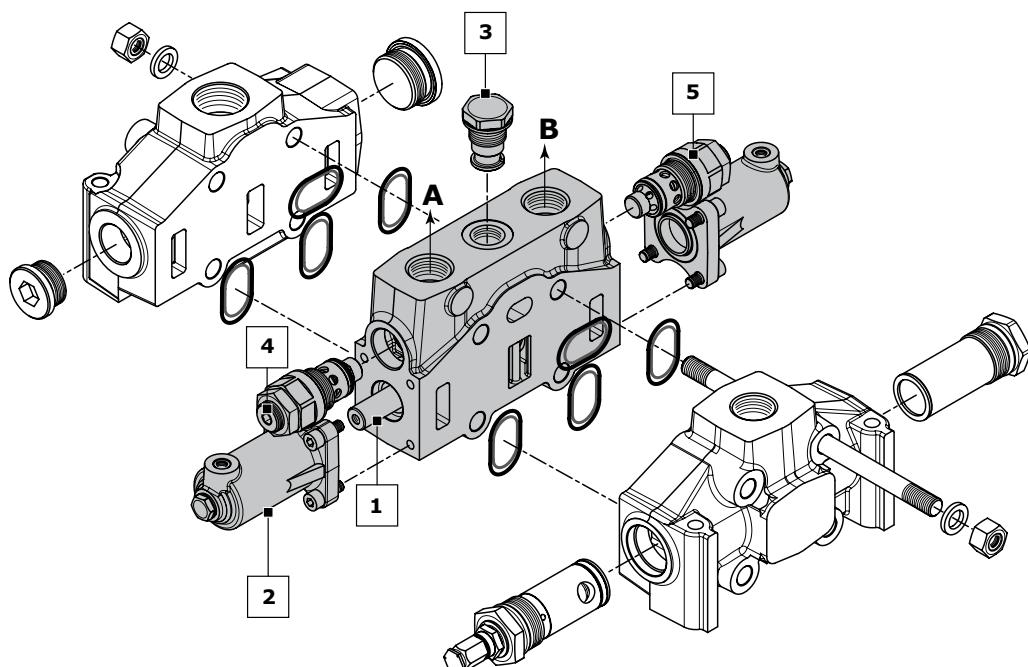

Rif.	Code	Description	Page
1	W001 W002	3 positions double-acting 3 positions double-acting A-B to tank	15
2	H101 H005*	Unprotected lever hydraulic actuation	17
3	RP G06 RP U06 RS G06 RS U06	Parallel circuit (G 1) Parallel circuit (1"5/16-12 UNF) Series circuit (G 1) Series circuit (1"5/16-12 UNF)	23
4	01 PA 100 05 PA	Antishock valve (port A) Prearrangement for auxiliary valve (port A)	24
5	01 PB 100 05 PB	Antishock valve (port B) Prearrangement for auxiliary valve (port B)	

NOTE: (*) Leave out the spool return action code when choosing H005.

Sections designed to house auxiliary valve option require double choice on work ports A and B.

Always indicate setting value when using antishock and combined valve: **01 PA (100) - 03 PA (100)**



D20 ■ SECTIONAL VALVE


walvoil
MOTORS BY PEOPLE

Spool identification


order example of spool: **W001 A J10**

W001	spool schema	3 positions double-acting
A	spool type	standard spool
J10	restricted service ports	restriction on diameter (0,10 mm in A and B)


W001 3 positions double-acting




W002 3 positions double-acting A and B to tank




W003 3 positions double-acting A to tank B blocked




W004 3 positions double-acting A blocked B to tank




W005 3 positions single - acting on A




W006 3 positions single - acting on B




W009 3 positions double-acting with anticavitation valves




W010 3 positions double-acting switch port closed (A - B blocked)




W011 3 positions double-acting switch port closed (A - B to tank)




W012 4 positions double-acting with float in the 4th position




W013 3 positions double-acting regenerative



W015 3 positions double-acting series



W016 3 positions double-acting series A and B to tank





spools with restricted service ports				
code	circuit	restriction on diameter (mm)	section (mm ²)	hydraulic schema
J10	A-B IN T	0,10	4,08	
K10	A IN T	0,10	4,08	
Y10	B IN T	0,10	4,08	

CODE	spool type available	
	STANDARD A	METERED B
W001	W001A	W001B
W002	W002A	W002B
W003	W003A	W003B
W004	W004A	W004B
W005	W005A	W005B
W006	W006A	W006B
W009	W009A	W009B
W010	W010A	
W011	W011A	
W012	W012A	
W013	W013A	
W015	W015A	
W016	W016A	

NOTE:

- W012, W013, spools need a special machining on the valve body.
- W015, W016, spools need RS type body.
- Float spool (W012) need special detent kit (F005).
- Regenerative spool (W013) need special return spring kits.
- Different spools are available on request.






Please contact our Sales department for more information.






D20 | SECTIONAL VALVE

walvoil
MOTION BY PEOPLE

Spool actuation classification for manual control

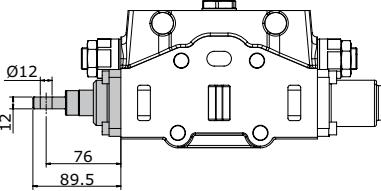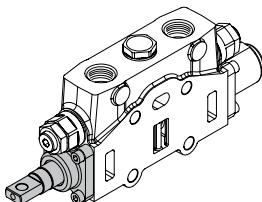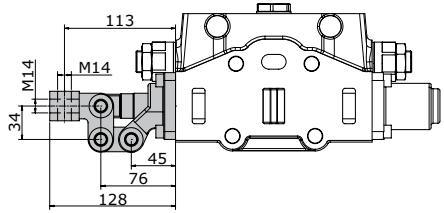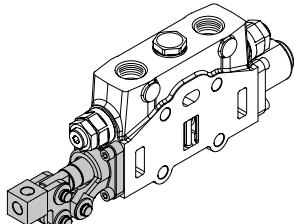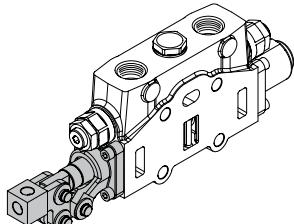code	description	dimensions	configuration
H004	Control without lever		
H101	Unprotected lever		
H102	Unprotected lever rotated 180°		

Spool actuation classification for Hydraulic control

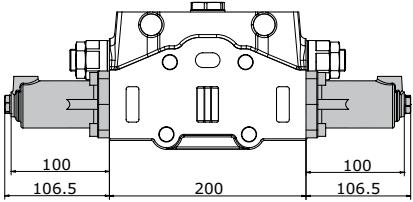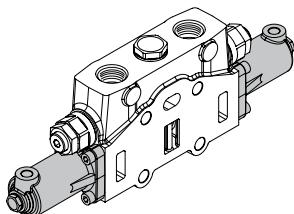
code	description	dimensions	configuration
H005 <small>leave out the spool return action code</small>	Hydraulic actuation with side ports BSP ports = G 1/4 UNF ports = 9/16-18 UNF		
H006 <small>leave out the spool return action code</small>	Hydraulic actuation with side ports and cast-iron end caps BSP ports = G 1/4 UNF ports = 9/16-18 UNF		



Spool return action classification - Springs load values

Spool return kits have three different spring types; following the codes depending on spring loads.

Spring type			
Code	A (standard spring)	B (soft spring)	C (heavy spring)
Preloading	196.2 N	145.1 N	313.9 N
End of stroke	245.2 N	176.6 N	412 N
Spool return action identification example			
Code	F001A	F001B	F001C

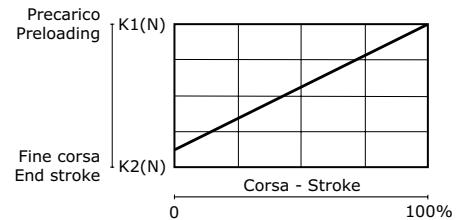

Spool return action classification

code	description	schema	dimensions	configuration
F001A				
F001B	3 positions spring-centred spool	~W[B0A]--		
F001C				
F002A	3 positions spring-centred spool detent in A and B	BA 0 ~W[B0A]--		
F003A	3 positions spring-centred spool detent in A	A 0 ~W[B0A]--		
F004A	3 positions spring-centred spool detent in B	B 0 ~W[B0A]--		
F005A	4 positions spring-centred spool detent in 4 th position (only for W012 spool)	4 0 ~W[B0A4]--		
F013A	3 positions spring-centred spool			
F013B	prearrangement			
F013C	dual command			




Pneumatic control classification

code	description	schema	dimensions	configuration
F020A	Pneumatic control ON - OFF	-		
F021A	Pneumatic control ON - OFF rotated 180°	-		
F022A	Proportional Pneumatic control	-		
F023A	Proportional Pneumatic control rotated 180°	-		
F135A	Pneumatic control ON - OFF	-		
F136A	Pneumatic control ON - OFF rotated 180°	-		
F126A	Proportional Pneumatic control	-		
F127A	Proportional Pneumatic control rotated 180°	-		

Proportional pneumatic control curve

The diagram shows the spool stroke as a function of the pneumatic pressure operating.

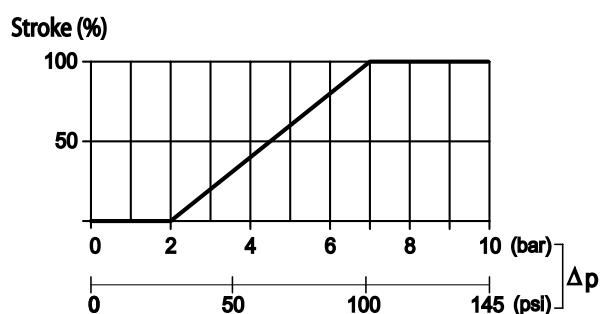





Electrohydraulic control specifications

Operating temperature range	-20°C / +80°C
Max inlet pressure	350 bar
Reduced pressure	16 bar
Back pressure on (T)	3 bar
Filtering degree	25 µ assoluti
Racommended pilot pipe size	Ø 6 mm - G 1/4

Electrohydraulic ON-OFF control with fixed pressure reducing valve

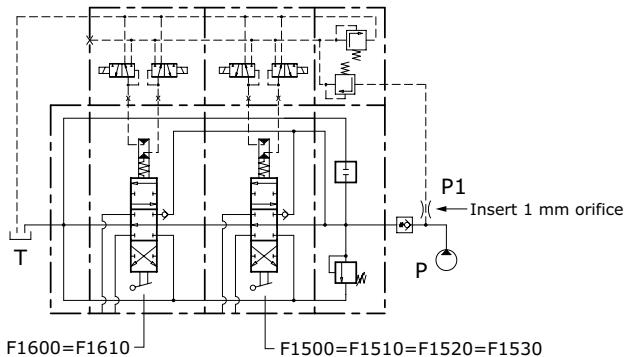

Electrohydraulic PROPORTIONAL control with fixed pressure reducing valve

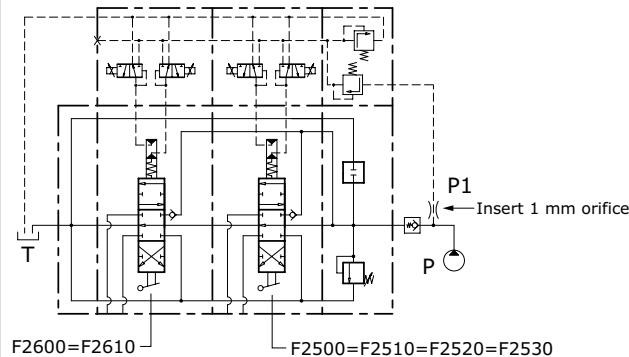

Proportional control kit, mechanically retrooperated, allows the maximum precision of positioning, limiting the hysteresis. The control is operated with PWM control of the current. PWM frequency suggest: 60-80 Hz

regulation currents



Nominal voltage (V)	Resistance R ₂₀ (Ohm)	Current min (A)	Current max (A)
12 vdc	3,7	0,9	1,7
24 vdc	15,5	0,45	0,85

Electrohydraulic control classification

code	description	dimensions	configuration
F1600	3 positions electrohydraulic control ON - OFF 12 Vdc		
F1610	3 positions electrohydraulic control ON - OFF 24 Vdc		
F2600	3 positions electrohydraulic control PROPORTIONAL 12 Vdc		
F2610	3 positions electrohydraulic control PROPORTIONAL 24 Vdc		

Electrohydraulic ON-OFF control is stackable with electrohydraulic PROPORTIONAL control (F2600 = F2610). Control kit already includes ortifice to make spool displacement more gradual.

**Electrohydraulic control with fixed pressure reducing valve classification**

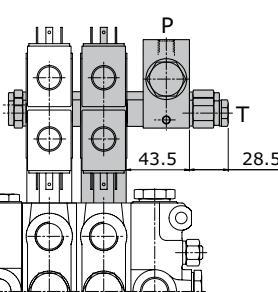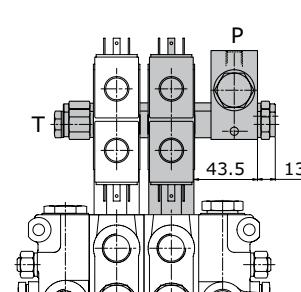code	description	configuration
F1500	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P - T inlet side (12 vdc)	 Port BSP (P - T) = G 1/4 Port UNF (P - T) = 9/16"18 UNF
F1510	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P - T inlet side (24 vdc)	
F2500	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P - T inlet side (12 vdc)	
F2510	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P - T inlet side (24 vdc)	
F1520	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P inlet - T outlet (12 vdc)	 Port BSP (P - T) = G 1/4 Port UNF (P - T) = 9/16"18 UNF
F1530	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P inlet - T outlet (24 vdc)	
F2520	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P inlet - T outlet (12 vdc)	
F2530	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P inlet - T outlet (24 vdc)	

Control tie rod assembly

The length of the control tie rod, will change depending on the section numbers; in this way it will be easy to install in the right way the sections and avoid any misassembly. Each kit is composed by 2 tie rods, 2 plugs, 2 connection ports and spacers according to the section number.


NOTE: the control tie rod kit has always to be ordered separately.

Reducing valve, combined with electrohydraulic control kit has to be calculated as a normal working section.

ORDER EXAMPLE:

Complete valves with 3 sections F1600 requires a complete tie-rod kit /3.

Complete valves with 2 sections F1600 and 1 section with F1500 (reducing valve) requires a complete tie-rod kit /4.

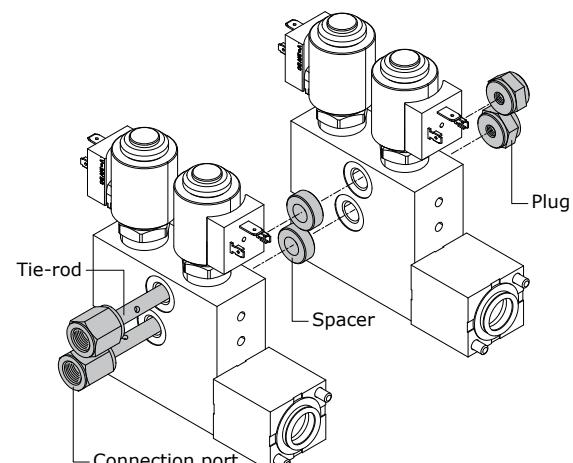**Order code fixed pressure reducing valve:**

915000303 = reducing valve for BSP ports

915000312 = reducing valve for UNF ports

Order code for control tie rod (BSP):

320103001 = control tie rod /1

320108001 = control tie rod /2

320108002 = control tie rod /3

320108003 = control tie rod /4

320108004 = control tie rod /5

320108005 = control tie rod /6

320108006 = control tie rod /7

320108007 = control tie rod /8

320108008 = control tie rod /9

Order code for control tie rod (UNF):

320103026 = control tie rod /1

320108012 = control tie rod /2

320108013 = control tie rod /3

320108014 = control tie rod /4

320108015 = control tie rod /5

320108016 = control tie rod /6

320108017 = control tie rod /7

320108018 = control tie rod /8

320108019 = control tie rod /9




Compatibility table

SPOOL ACTION TYPE	SPOOL TYPE																			
	W001A	W001B	W002A	W002B	W003A	W003B	W004A	W004B	W005A	W005B	W006A	W006B	W009A	W009B	W010A	W011A	W012A	W013A	W015A	W016A
H101	
H102	
H004	
H005	
H006	
SPOOL RETURN ACTION TYPE	SPOOL TYPE																			
	W001A	W001B	W002A	W002B	W003A	W003B	W004A	W004B	W005A	W005B	W006A	W006B	W009A	W009B	W010A	W011A	W012A	W013A	W015A	W016A
F001	
F002	
F003	
F004	
F005																.				
F013	
F020=F021	
F022=F023	
F135=F136	
F126=F127	
F0620=F0630	
F1500=F1510	
F1520=F1530	
F2500=F2510	
F2520=F2530	
F1600=F1610	

**Work section identification**


working section type	
RP G06	
RP G07	
RP U06	
RP S05	
RP S06	
RP S33	
RP S34	

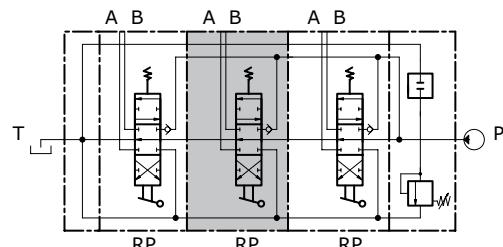

Parallel
circuit
section

When the spool is operated it intercepts the by-pass gallery by diverting the flow of oil to service port A or B. If two or more spools are actuated at the same time, the oil will power the service port that has the lower load; by throttling the spools, the flow of oil can be divided between two or more service ports.

Series circuit section	
RS G06	
RS G07	
RS U06	
RS S05	
RS S06	
RS S33	
RS S34	

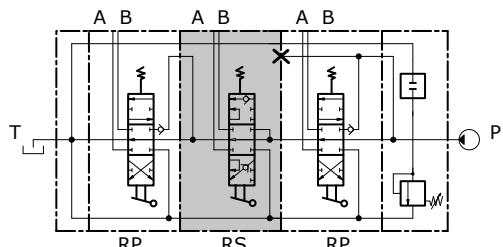

Series
circuit
section

When the spool is operated it intercepts the switch gallery by diverting the flow of oil to service port A or B. The oil that flows back from the actuator is carried to the switch gallery thus making it available to the service ports downstream from the series section. The pressure drop downstream is added to the pressure drop of the section itself.



Auxiliary valve identification

code	description	schema	configuration	setting range (bar)			
				type	at full flow	type	at min. flow
01 PA	Antishock valve (port A)			A	0 / 70	A	0-A / 50-A
				B	71 / 120	B	51-A / 70-A
				C	121 / 150	C	71-A / 110-A
				D	151 / 300	D	111-A / 240-A
				E	301 / 350	E	241-A / 350-A
02 PA	Anticavitation valve (port A)						
04 PA	Pilot combined valve (port A)			A	30 / 110		
				B	111 / 350		
05 PA	Prearrangement for auxiliary valve (port A)						

code	description	schema	configuration	setting range (bar)			
				type	at full flow	type	at min. flow
01 PB	Antishock valve (port B)			A	0 / 70	A	0-A / 50-A
				B	71 / 120	B	51-A / 70-A
				C	121 / 150	C	71-A / 110-A
				D	151 / 300	D	111-A / 240-A
				E	301 / 350	E	241-A / 350-A
02 PB	Anticavitation valve (port B)						
04 PB	Pilot combined valve (port B)			A	30 / 110		
				B	111 / 350		
05 PB	Prearrangement for auxiliary valve (port B)						


Auxiliary valve - Setting range

Sections designed to house auxiliary valve option require double choice on work ports A and B.
Always indicate setting value when using antishock valve and pilot combined valve:

- 01 PA (120) = setting at full flow**
- 01 PA (120-A) = setting at min. flow**
- 04 PA (120) = setting at min. flow**

**INTERMEDIATE INLET SECTION****Order example**

	BE	inlet side	009	150	A G06
1.	009	valve arrangement			
	150	setting (bar); when ordering a main relief valve it is necessary to specify setting			
2.	A G06	inlet position and available thread type			

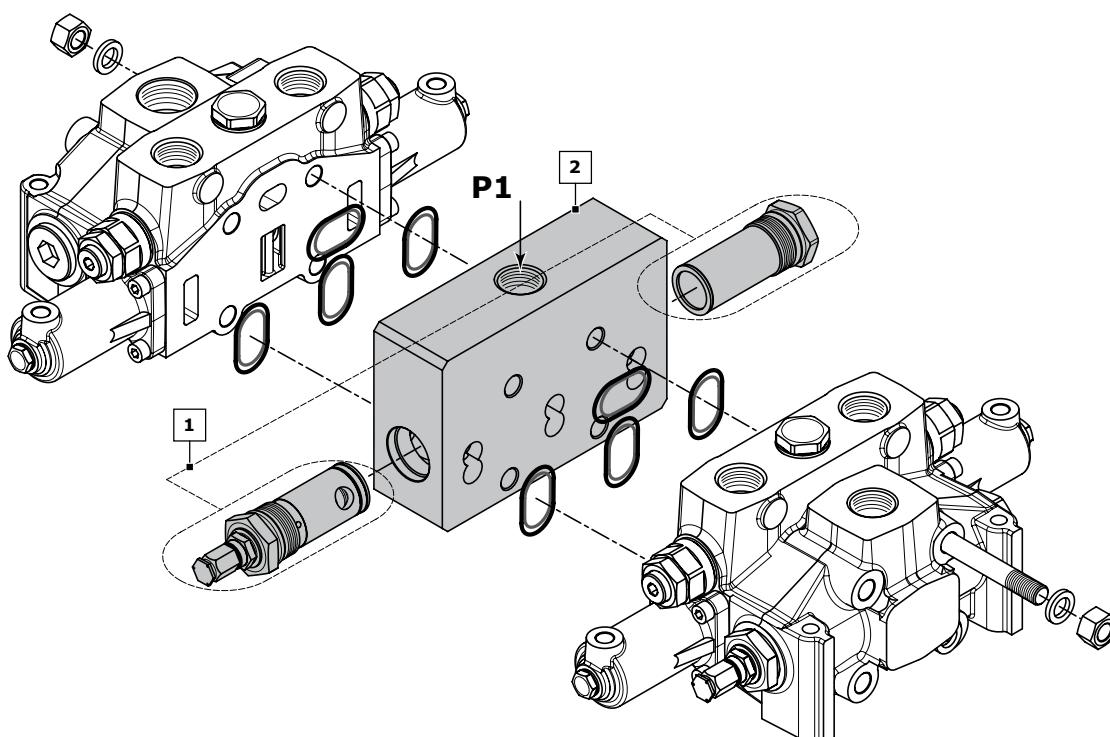


Rif.	Code	Description	Page
-	BE	Intermediate inlet section	
	BV*	Intermediate inlet section with pressure relief valve	26
1	009	Pilot operated pressure relief valve	
	010	Pilot operated pressure relief valve and Main anticavitation check valve	
	019	Without valves	
	020	Main anticavitation check valve	27
2	A G06	Upper inlet (thread G 1)	
	A U06	Upper inlet (thread 1"5/16-12 UNF)	

NOTE: when ordering a relief valve it is necessary to specify factory setting (example 150).


* = omit the code for inlet positioning and thread



Intermediate inlet section classifications

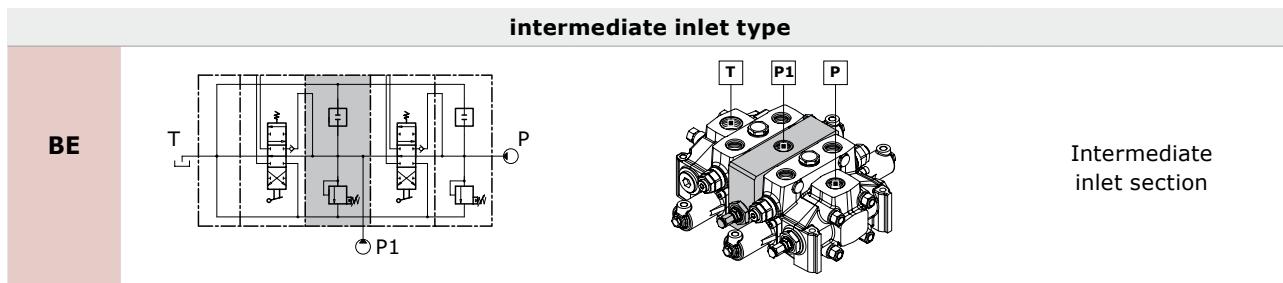

The intermediate inlet section is driven by two pumps (P + P1). The downstream elements can be set to a lower pressure than the upstream ones by adjusting the pressure relief valve of the intermediate section in question.

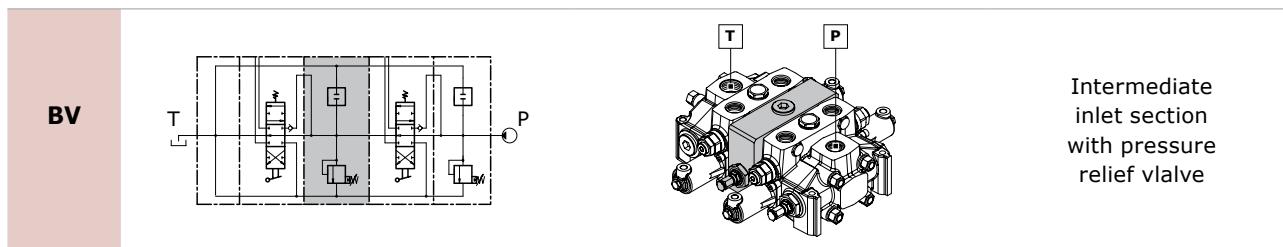


The intermediate inlet section and the elements are driven by a single pump (P). The downstream elements can be set to a lower pressure than the upstream ones by adjusting the pressure relief valve of the intermediate section in question.

Valve identification on intermediate inlet section

type	schema	layout	description	type	schema	configurazione	descrizione
2			Pilot operated pressure relief valve	4			Externally piloted valve
3			Relief valve plugged	11			Plug with pressure-gauge connection

Valve arrangement on intermediate inlet section

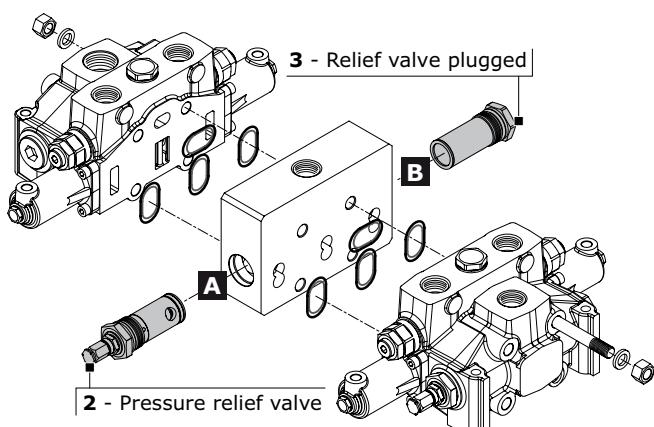

Combination valve example: 009 = 2A - 3B

- 009 Combination valve
- 2A Pressure relief valve in port A
- 3B Relief valve plugged in port B

The code identifies:

with a number, the type of valve; with a letter its position on the inlet section.

(A) = spool action side

(B) = spool return action side

NOTE: when ordering a main relief valve it is necessary to specify setting



VALVE COMBINATION INLET SECTION	Valve type on port B			
Valve type on port A	2	3	4	11
		009	010	016
	018	019	020	027
	029	030		
	085	086		

Inlet combination and thread available

A G06

A G07


A U06

A S05

A S06

A S33

A S34

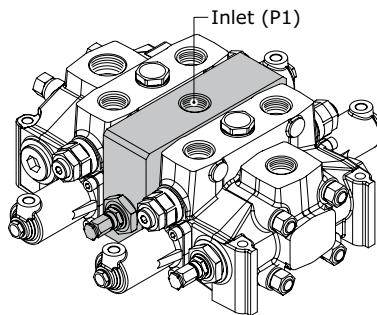

Upper inlet

**Complete configuration samples for D20/2 with intermediate inlet section (BE)**


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BE 009 150 A G06Intermediate inlet section

W001A H101 F001A RP G06..... Working section

TJ A G07 Outlet section

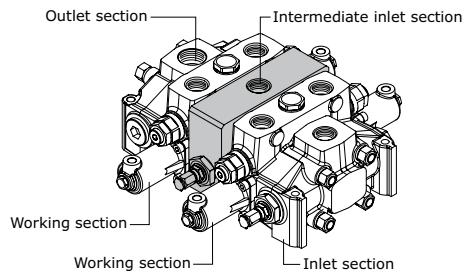**Complete configuration samples for D20/2 with intermediate inlet section (BV)**


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BV 009 150Intermediate inlet section

W001A H101 F001A RP G06..... Working section

TJ A G07 Outlet section

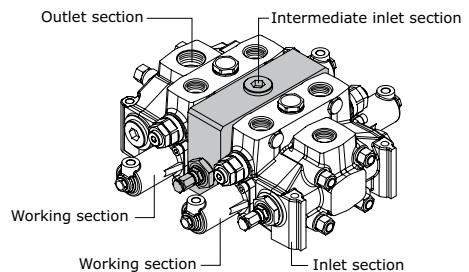




INTERMEDIATE OUTLET SECTION

Order example

	BF	A G07
	inlet side	
1.	A G07	inlet position and available thread type


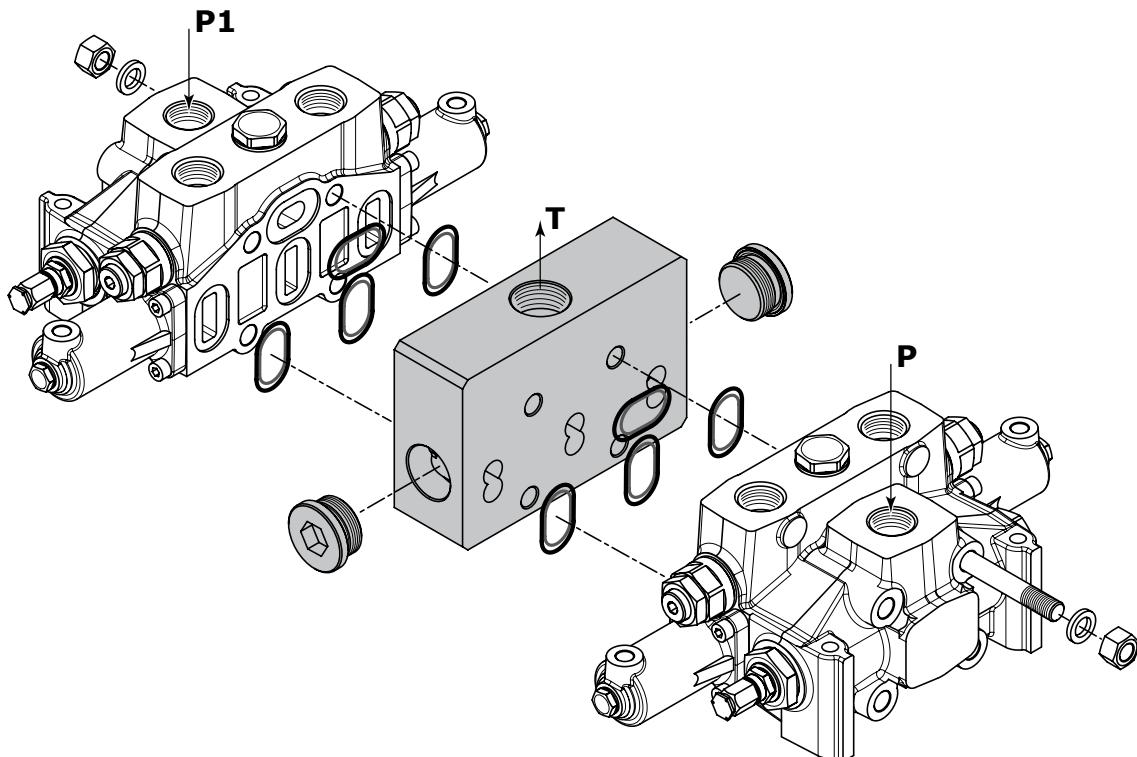


Rif.	Code	Type	Description	Page
-	BF		Intermediate outlet section with single tank return	
-	BG		Intermediate outlet section with two tank returns	
1	A G07		Upper outlet (thread G 1"1/4)	
	A U07		Upper outlet (thread 1"5/8-12 UNF)	
	G G07	for	Front outlet side A (thread G 1"1/4)	
	G U07	BF	Front outlet side A (thread 1"5/8-12 UNF)	30
	H G07		Rear outlet side B (thread G 1"1/4)	
	H U07		Rear outlet side B (thread 1"5/8-12 UNF)	
J G07	for	Upper outlet HPCO - front side A and rear side B to T (thread G 1"1/4)		
J U07	BG	Upper outlet HPCO-front side A and rear side B to T (thread 1"5/8-12 UNF)		





Intermediate outlet section classifications

intermediate outlet type

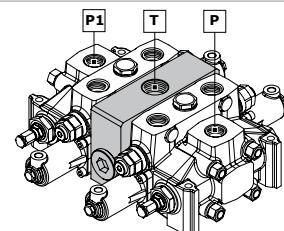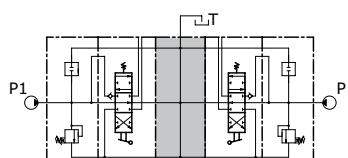BFIntermediate outlet section
with single tank return


The above outlet section allows the flow of oil of the two pumps and the tank ports to be piped to a single outlet T.

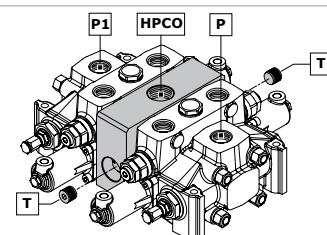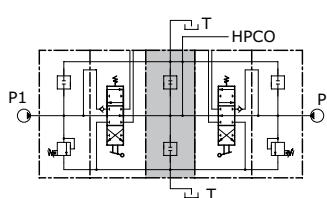BGIntermediate outlet section
with two tank returns


The section in question allows the flow of oil of the two pumps to be piped in two outlets: HPCO for powering another directional control valve, T for discharge of the work ports. In order to obtain this, the two T need to be linked.

Outlet position and available thread type (for BF intermediate)


Outlet combination and thread available

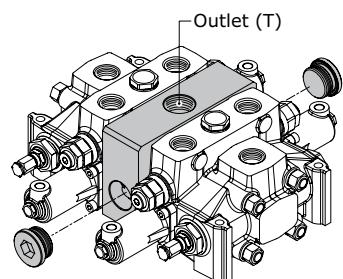A G07

Upper outlet (T)

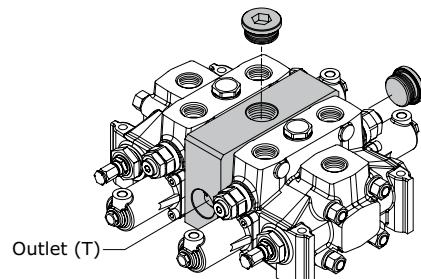A U07**A S07****A S08****G G07****G U07****G S07****G S08****H G07****H U07****H S07****H S08**

Front outlet side A (T)

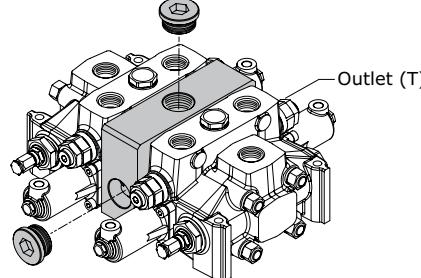


Rear outlet side B (T)



D20 | SECTIONAL VALVE

walvoil
MOTORS BY PEOPLE

Outlet position and available thread type (for BG intermediate)

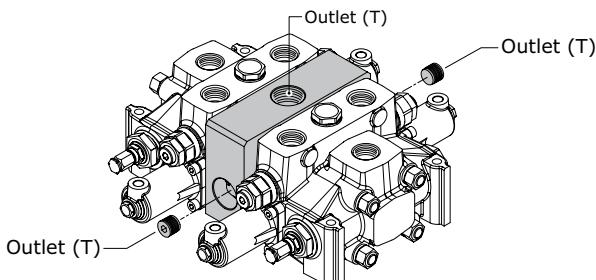Inlet combination and thread available	
J G07	
J U07	
J S07	
J S08	 <p>Outlet (T) (top left) Outlet (T) (top right) Outlet (T) (bottom left) Outlet (T) (bottom right)</p> <p>Upper outlet HPCO front side A and rear side B to T</p>

Complete configuration samples for D20/2 with intermediate outlet section (BF)


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BF A G07**Intermediate outlet section**

W001A H101 F001A RP G06..... Working section

IL 009 150 A G06..... Left inlet section

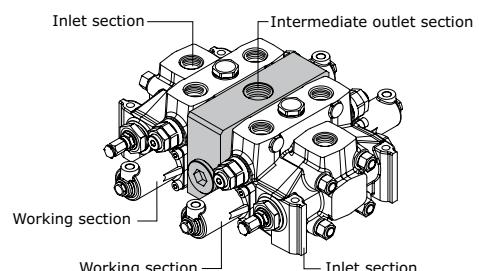

Complete configuration samples for D20/2 with intermediate outlet section (BG)


IR 009 150 A G06 Right inlet section

W001A H101 F001A RP G06..... Working section

BG J G07**Intermediate outlet section**

W001A H101 F001A RP G06..... Working section


IL 009 150 A G06..... Left inlet section

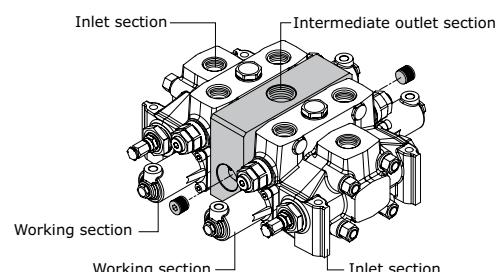



OUTLET SECTION (VERSION 1 OUTLET)

Order example

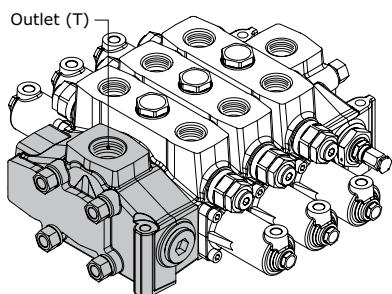


TJ | A G07

1. **TJ** outlet section type _____
 2. **A G07** outlet position and available thread type _____

Rif.	Code	Description	Page
1	TJ TK	Outlet section with single return (T) right-side inlet (P) Outlet section with single return (T) left-side inlet (P)	
2	A G07 A U07 A S07 A S08 C G07 C U07 C S07 C S08	Upper outlet (thread G 1"1/4) Upper outlet (thread 1"5/8-12 UNF) Upper outlet (thread SAE 3000 - 1"1/4 MA) Upper outlet (thread SAE 3000 - 1"1/4 UNC) Central outlet (thread G 1"1/4) Central outlet (thread 1"5/8-12 UNF) Central outlet (thread SAE 3000 - 1"1/4 MA) Central outlet (thread SAE 3000 - 1"1/4 UNC)	33

OUTLET SECTION (HPCO VERSION OUTLET)

Order example - HPCO version Outlet

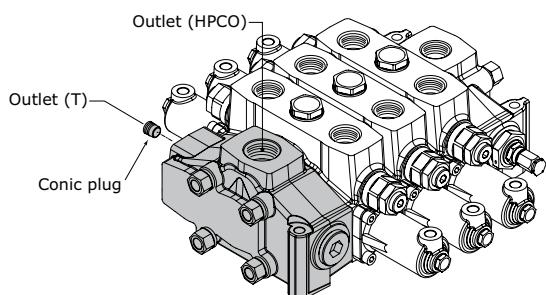

TM | M G07

1. **TM** outlet section type _____
 2. **M G07** outlet position and available thread type _____

Rif.	Code	Description	Page
1	TM TN	Outlet section with two return (T-HPCO) right-side inlet (P) Outlet section with two return (T-HPCO) left-side inlet (P)	
2	M G07 M U07 M S07 M S08 N G07 N U07 N S07 N S08	HPCO upper outlet T (tank) rear outlet side B (thread G 1"1/4) HPCO upper outlet T (tank) rear outlet side B (thread 1"5/8-12 UNF) HPCO upper outlet T (tank) rear outlet side B (thread SAE 3000 - 1"1/4 MA) HPCO upper outlet T (tank) rear outlet side B (thread SAE 3000 - 1"1/4 UNC) HPCO upper outlet T (tank) front outlet side A (thread G 1"1/4) HPCO upper outlet T (tank) front outlet side A (thread 1"5/8-12 UNF) HPCO upper outlet T (tank) front outlet side A (thread SAE 3000 - 1"1/4 MA) HPCO upper outlet T (tank) front outlet side A (thread SAE 3000 - 1"1/4 UNC)	34

Outlet with single tank classification

outlet identification		
TJ	TK	
Outlet section with single return (T) right-side inlet (P)	Outlet section with single return (T) left-side inlet (P)	
outlet combination and thread available		
A G07	Upper outlet (thread G 1"1/4)	
A U07	Upper outlet (thread 1"5/8 - 12 UNF)	
A S07	Upper outlet (thread SAE 3000 - 1"1/4 MA)	
A S08	Upper outlet (thread SAE 3000 - 1"1/4 UNC)	
C G07	Central outlet (thread G 1"1/4)	
C U07	Central outlet (thread 1"5/8 - 12 UNF)	
C S07	Central outlet (thread SAE 3000 - 1"1/4 MA)	
C S08	Central outlet (thread SAE 3000 - 1"1/4 UNC)	
F G07	Lateral outlet (thread G 1"1/4)	
F U07	Lateral outlet (thread 1"5/8 - 12 UNF)	
G G07	only for TK	Front outlet side A (thread G 1"1/4)
G U07		Front outlet side A (thread 1"5/8 - 12 UNF)
G S07		Front outlet side A (thread SAE 3000 - 1"1/4 MA)
G S08		Front outlet side A (thread SAE 3000 - 1"1/4 UNC)
H G07	only for TJ	Rear outlet side B (thread G 1"1/4)
H U07		Rear outlet side B (thread 1"5/8 - 12 UNF)
H S07		Rear outlet side B (thread SAE 3000 - 1"1/4 MA)
H S08		Rear outlet side B (thread SAE 3000 - 1"1/4 UNC)




Outlet with two tanks classification

outlet identification	
TM	Outlet section with two return (T-HPCO) right-side inlet (P)
	<p>Diagram showing the internal structure of the TM outlet section. It features three vertical chambers labeled A3, B3, A2, B2, A1, and B1 from top to bottom. Each chamber has a valve assembly. The rightmost chamber (B1) has an outlet labeled 'T' at the top and an inlet labeled 'P' at the bottom. The leftmost chamber (A1) has an outlet labeled 'T' at the top and an inlet labeled 'Conic plug' at the bottom. The middle chambers (B2, A2, B3) have outlets labeled 'T' at the top and inlets labeled 'Conic plug' at the bottom. Arrows indicate fluid flow from the bottom of each chamber through the valves to the outlets.</p> <p>Exploded view of the TM outlet section. Labels point to the 'Inlet (P)', 'Outlet (HPCO)', 'Conic plug', and 'Outlet (T)'.</p>
TN	Outlet section with two return (T-HPCO) left-side inlet (P)
	<p>Diagram showing the internal structure of the TN outlet section. It features three vertical chambers labeled B1, A1, B2, A2, B3, and A3 from top to bottom. Each chamber has a valve assembly. The leftmost chamber (A1) has an outlet labeled 'T' at the top and an inlet labeled 'P' at the bottom. The middle chambers (B2, A2, B3) have outlets labeled 'T' at the top and inlets labeled 'Conic plug' at the bottom. The rightmost chamber (A3) has an outlet labeled 'T' at the top and an inlet labeled 'Conic plug' at the bottom. Arrows indicate fluid flow from the bottom of each chamber through the valves to the outlets.</p> <p>Exploded view of the TN outlet section. Labels point to the 'Inlet (P)', 'Outlet (HPCO)', 'Conic plug position', and 'Outlet (T)'.</p>


outlet combination and thread available					
M G07	M U07	M S07	only for TM	Q G07	Q U07
				HPCO Upper outlet T rear outlet side B (thread G 1"1/4)	HPCO Upper outlet T rear outlet side B (thread 1"5/8-12 UNF)
				HPCO Upper outlet T rear outlet side B (thread SAE 3000 3/4 MA)	HPCO Upper outlet T rear outlet side B (thread SAE 3000 3/4 UNC)
				HPCO Upper outlet T rear outlet side B (thread SAE 6000 1" MA)	HPCO Upper outlet T rear outlet side B (thread SAE 6000 1" UNC)
				HPCO Upper outlet T rear outlet side B (thread SAE 6000 1" UNC)	HPCO Central outlet T front outlet side A (thread SAE 6000 1" MA)
M S35					
M S36					
N G07	N U07	N S07	only for TN	R G07	R U07
				HPCO Upper outlet T front outlet side A (thread G 1"1/4)	HPCO Upper outlet T rear outlet side B (thread G 1"1/4)
				HPCO Upper outlet T front outlet side A (thread 1"5/8-12 UNF)	HPCO Upper outlet T front outlet side A (thread SAE 3000 3/4 MA)
				HPCO Upper outlet T front outlet side A (thread SAE 3000 3/4 UNC)	HPCO Upper outlet T front outlet side A (thread SAE 6000 1" MA)
				HPCO Upper outlet T front outlet side A (thread SAE 6000 1" MA)	HPCO Central outlet T front outlet side A (thread SAE 6000 1" UNC)
N S35					
N S36					
P G07	P U07	P S07	only for TM	S G07	S U07
				HPCO Central outlet T rear outlet side B (thread G 1"1/4)	HPCO Upper outlet T side outlet A (thread G 1"1/4)
				HPCO Central outlet T rear outlet side B (thread 1"5/8-12 UNF)	HPCO Upper outlet T side outlet A (thread 1"5/8-12 UNF)
				HPCO Central outlet T rear outlet side B (thread SAE 3000 3/4 MA)	HPCO Upper outlet T side outlet A (thread 1"5/8-12 UNF)
				HPCO Central outlet T rear outlet side B (thread SAE 3000 3/4 UNC)	HPCO Upper outlet T side outlet A (thread 1"5/8-12 UNF)
				HPCO Central outlet T rear outlet side B (thread SAE 6000 1" MA)	HPCO Upper outlet T side outlet A (thread 1"5/8-12 UNF)
				HPCO Central outlet T rear outlet side B (thread SAE 6000 1" UNC)	HPCO Upper outlet T side outlet A (thread 1"5/8-12 UNF)
P S35					
P S36					

**CARRY-OVER CONNECTION (HPCO)**

This option, available on all D20, allows the sectional valve to feed a second valve, by extending the free flow channel. In this configuration, the valve need a separated port for connection to tank.

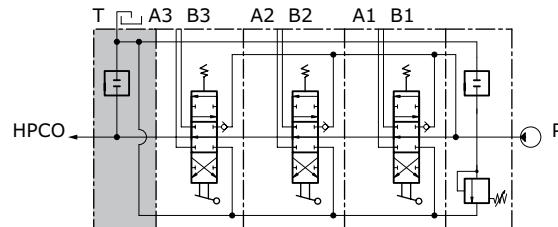


It is possible to transform sectional valve from standard to HPCO version just by ordering the appropriate conic plug:

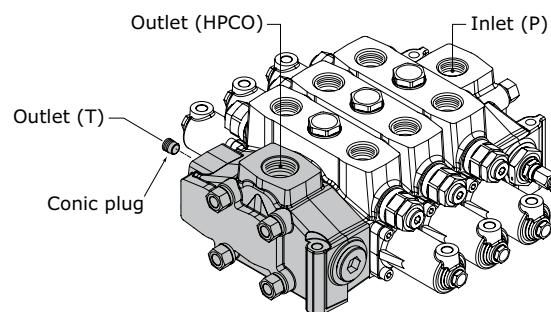

code (HPCO Plug identification)	description	q.ty
413010201	conic plug G 1/2 x 17	1



D20 SPARE PARTS LIST

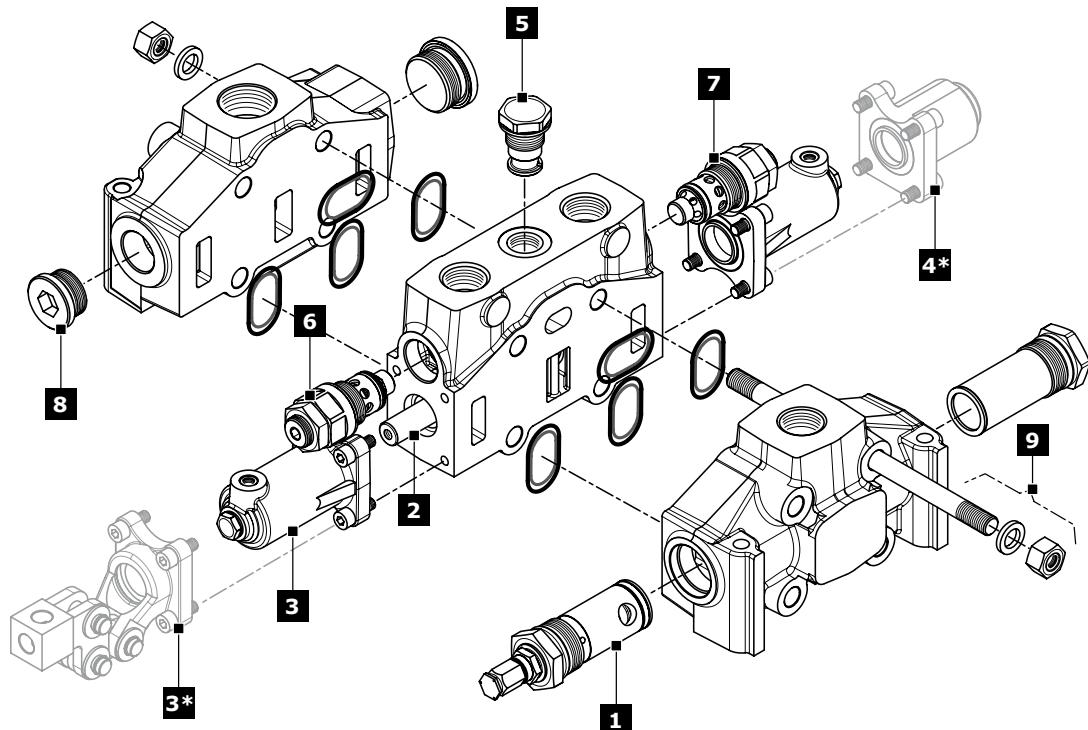

Ref.	Description	Order code	Q.ty	Code	Note
1	Pilot operated pressure relief valve (*)	30168			Setting: 100 bar
		3143	1		Setting: 200 bar
		4383			Setting: 300 bar
2	Relief valve plugged	430109001	1	-	
	Main Anticavitation check valve	915050901	1		
	External piloted valve	915040901	1		
	Plug with pressure-gauge connection	430109003	1		
3*	3 positions double-acting spool	421208010		W001A	
		421208022	1	W001B	
		421208001		W001A	for hydraulic actuation
	3 positions double-acting A and B to tank spool	421208005		W002A	
		421208002	1	W002B	
3		421208023		W002A	for hydraulic actuation
	3 positions single-acting on A	421208015	1	W005A	
	3 positions single-acting on B	421208017	1	W006A	
	4 positions double-acting with float in the 4 th pos.	421208012	1	W012A	
		421208011			for hydraulic actuation
3*	Control without lever	320308002	1	H004	
		320308005			only for W012 spool
3*	Protected vertical safety lever	320308001	1	H101 = H102	
		320308003			only for W012 spool
3	Hydraulic actuation with side ports	320508001	2	H005	for BSP version
		320508005	1		only for W012 spool - for BSP version
		320508023	2		for UNF version
		320508024	1		only for W012 spool - for UNF version




D20 ■ SECTIONAL VALVE

walvoil
MOTORS BY PEOPLE

Ref.	Description	Order code	Q.ty	Code	Note
	3 position spring centred spool	320708001	1	F001A	
	Detent in A and B	320808001	1	F002A	
	Detent in A	320808002	1	F003A	
	Detent in B	320808003	1	F004A	
	Detent in 4 th position	320808004	1	F005A	only for W012 spool
	Prearrangement dual command	320708005	1	F013A	
	Pneumatic control ON-OFF	321108003	1	F020A=F021A	BSP ports
		321208002	1	F022A=F023A	BSP ports
	Proportional Pneumatic control	321208004	1	F126A=F127A	NPT ports
	Electrohydraulic ON-OFF (12 vdc)	321408021	1	F1600	
4*	Electrohydraulic ON-OFF (24 vdc)	321408022	1	F1610	
	Electrohydraulic Proportional (12 vdc)	322008001	1	F2600	
	Electrohydraulic Proportional (24 vdc)	322008002	1	F2610	
	Electrohydraulic ON-OFF (12 vdc) with reducing valve	321408023	1	F1500=F1520	BSP ports
	Electrohydraulic ON-OFF (24 vdc) with reducing valve	321408024	1	F1510=F1530	BSP ports
	Electrohydraulic Proportional (12 vdc) with reducing valve	322008003	1	F2500=F2520	BSP ports
	Electrohydraulic Proportional (24 vdc) with reducing valve	322008004	1	F2510=F2530	BSP ports
	Electrohydraulic ON-OFF (12 vdc) with reducing valve	321408025	1	F1500=F1520	UNF ports
	Electrohydraulic ON-OFF (24 vdc) with reducing valve	321408025	1	F1510=F1530	UNF ports
	Electrohydraulic Proportional (12 vdc) with reducing valve	322008005	1	F2500=F2520	UNF ports
	Electrohydraulic Proportional (24 vdc) with reducing valve	322008006	1	F2510=F2530	UNF ports
5	Check valve on the work section	320208001	1	-	only for RP and RT section
	Antishock valve on port A	3027			
		2647		01 PA	Setting: 100 bar
		2781			Setting: 200 bar
					Setting: 300 bar
6	Anticavitation valve on port A	915080801	1	02 PA	
		15888			Setting: 100 bar
	Pilot combined valve on port A	5091		04 PA	Setting: 200 bar
		8943			Setting: 300 bar
	Prearrangement for auxiliary valve on port A	430409001		05 PP	
	Antishock valve on port B	3027			Setting: 100 bar
		2647		01 PB	Setting: 200 bar
		2781			Setting: 300 bar
7	Anticavitation valve on port B	915080801	1	02 PB	
		15888			Setting: 100 bar
	Pilot combined valve on port B	5091		04 PB	Setting: 200 bar
		8943			Setting: 300 bar
	Prearrangement for auxiliary valve on port B	430409001		05 PB	
	Plug kit (G 1)	430000021		G06	
8	Plug kit (G 1"1/4)	430000022	1	G07	
	Plug kit (1"5/16-12 UNF)	300008002		U06	
	Plug kit (1"5/8-12 UNF)	300009002		U07	



GASKET KITS

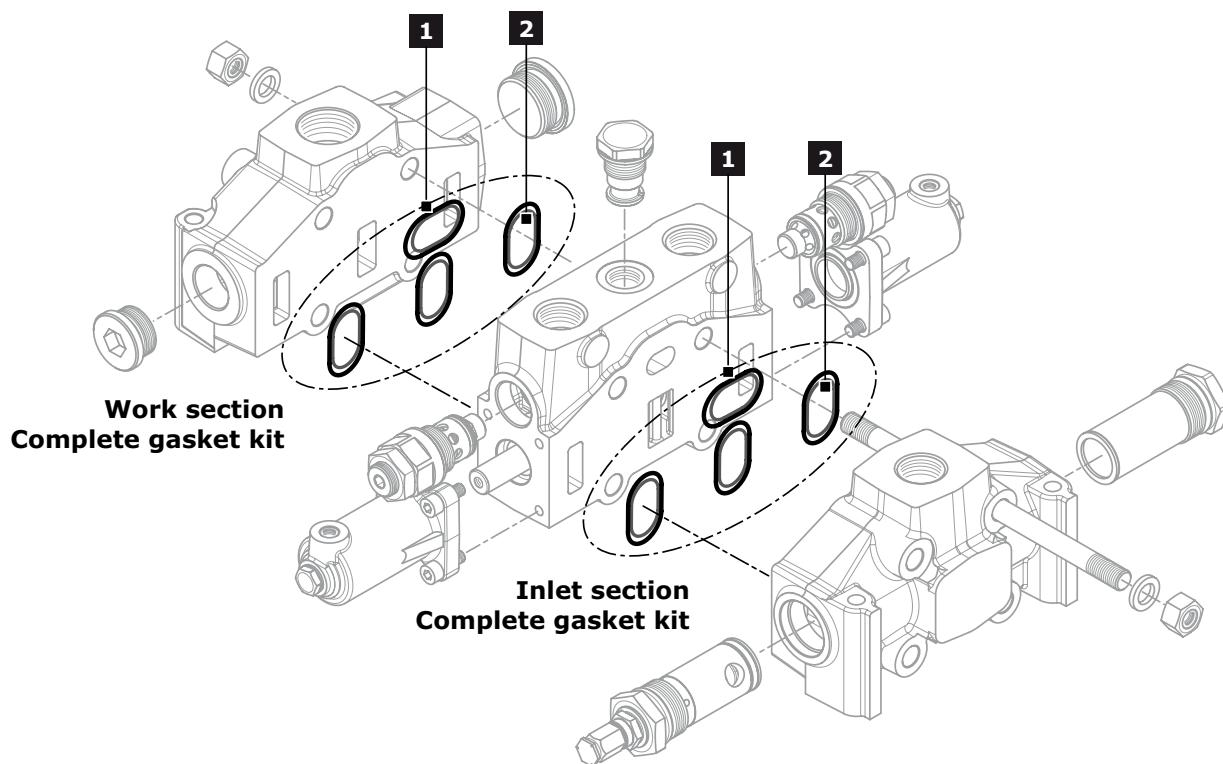

Inlet and work section			
Rif.	Order code	Description	Q.ty
1	423401017	Ring	4
2	412020603	O.R. 90SH (2-129)	4

Complete Gasket kit: order code - 350909001



INSTALLATION AND MAINTENANCE

Guidelines


- Mount the control valve securely to a flat surface (recommended 3 point fixing); at the time do not use a hammer to positioning by hitting.
- When handling the control valve, be careful not hold the pilot cover or return spring cap of the spool or accessory valves such as main relief valves and anti-shock relief valves.
- Clean piping materials sufficiently before use.
- Make sure to prevent the port openings from being entered with dust or foreign matters.
- Tighten the port connectors surely with the recommended fastening torques.
- Do not direct the jet of a pressure washing unit directly to the valve.

Fittings tightening torque (Nm)

thread type	port P	Port A - B	Port T
BSP (ISO - 228)	G 1	G 1	G 1
with rubber sealing (DIN 3869)	120	120	120
with copper or steel and rubber washer	120	120	120
BSP (ISO - 228)	G 1"1/4	G 1"1/4	G 1"1/4
with rubber sealing (DIN 3869)	120	120	120
with copper or steel and rubber washer	120	120	120
UN-UNF (ISO - 725)	1"1/16 12 UNF	1"1/16 12 UNF	1"1/16 12 UNF
with O.R.	120	120	120
UN-UNF (ISO - 725)	1"5/16 12 UNF	1"5/16 12 UNF	1"5/16 12 UNF
with O.R.	120	120	120

General clamping torque

The following table provides the main tightening torques of the distributor D20:

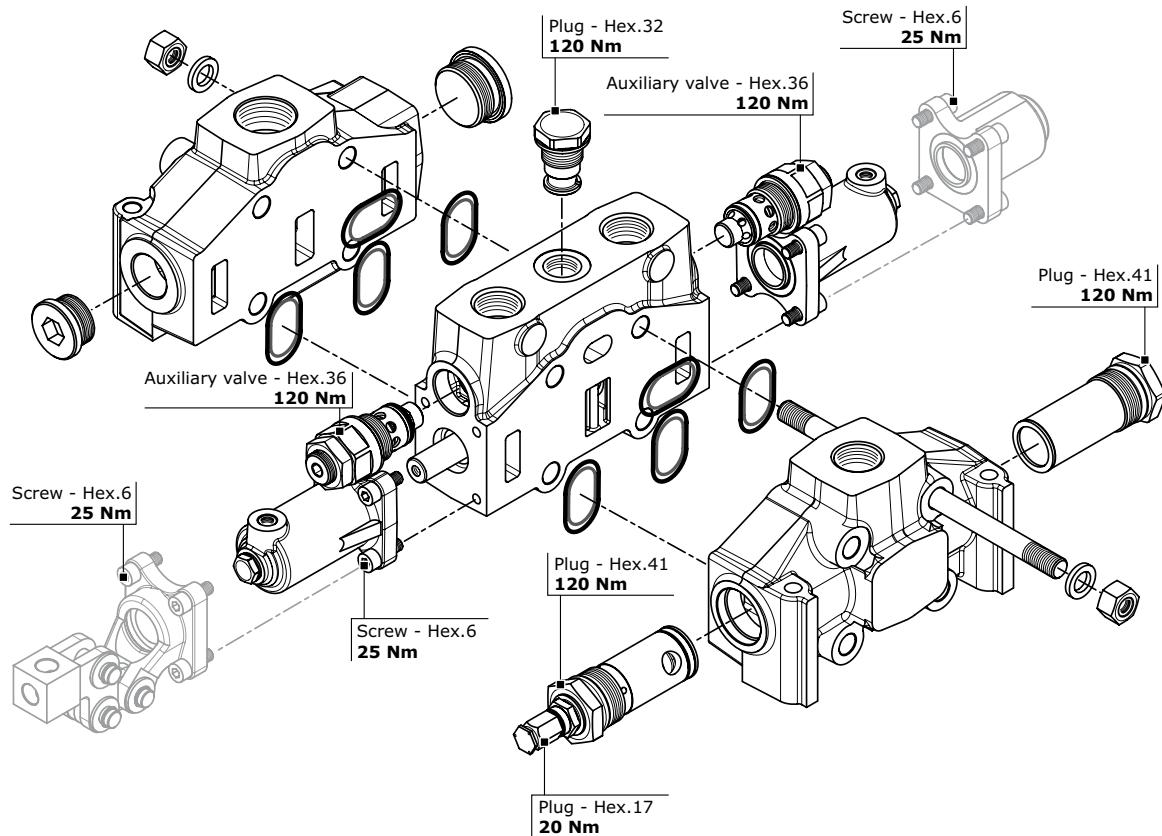



Dimensions - Thread codes

The connection ports size is indicated by an ordering code common for all Hydrocontrol products. Following table shows all available connections.

METRIC THREAD (ISO 9974-1)

Type	M18x1,5	M22x1,5	M27x2
Code	M01	M02	M03


BSP THREAD (ISO 1179-1)

Type	1/4"	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Code	G02	G03	G04	G05	G06	G07	G08	G09

UN / UNF THREAD (ISO 11926-1)

Type	9/16" 18 UNF SAE6	3/4" 16 UNF SAE8	7/8" 14 UNF SAE10	1"1/16 12 UNF SAE12	1"5/16 12 UNF SAE16	1"5/8 12 UNF SAE20	
Code	U02	U03	U04	U05	U06	U07	

Dimensions - SAE Flange codes

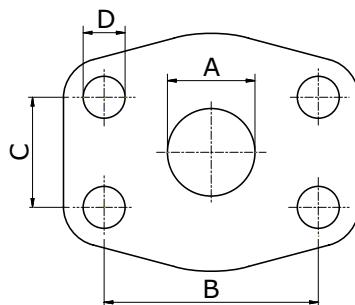

SAE / 3000 FLANGE (ISO 6162-1)

Type	3/4" (MA)	3/4" (UNC)	1" (MA)	1" (UNC)	1"1/4 (MA)	1"1/4 (UNC)	1"1/2 (MA)	1"1/2 (UNC)	2" (MA)	2" (UNC)	3" (MA)	3" (UNC)
Code	S03	S04	S05	S06	S07	S08	S09	S10	S11	S12	S15	S16
A	19	19	25	25	32	32	38	38	51	51	76	76
B	47,6	47,6	52,4	52,4	58,7	58,7	69,9	69,9	77,8	77,8	106,4	106,4
C	22,3	22,3	26,2	26,2	30,2	30,2	35,7	35,7	42,9	42,9	61,9	61,9
D	M10	3/8-16	M10	3/8-16	M10	7/16-14	M12	1/2-13	M12	1/2-13	M16	5/8-11

SAE / 6000 FLANGE (ISO 6162-2)

Type	3/4" (MA)	3/4" (UNC)	1" (MA)	1" (UNC)	1"1/4 (MA)	1"1/4 (UNC)	1"1/2 (MA)	1"1/2 (UNC)
Code	S33	S34	S35	S36	S37	S38	S39	S40
A	19	19	25	25	32	32	38	38
B	50,8	50,8	57,2	57,2	66,6	66,6	79,3	79,3
C	23,8	23,8	27,8	27,8	31,8	31,8	36,5	36,5
D	M10	3/8-16	M12	7/16-14	M14	1/2-13	M16	5/8-11



GENERAL CONDITIONS AND PATENTS

Introduction

These general conditions apply to all general supplies from Hydrocontrol s.p.a., after receiving orders from the Customer. Should commercial terms such as EXW, DDP, etc be mentioned, of course the Incoterms of the International Chamber of Commerce must be referred to, according to the test existing when the general supply conditions are agreed on.

Management of orders

No Customer's order is binding to Hydrocontrol s.p.a. if Hydrocontrol s.p.a. has not confirmed the order in writing. Hydrocontrol s.p.a. commits to supplying the orders in compliance with the order confirmation that has been issued. Any disagreement with the content of the order confirmation must be communicated in writing to Hydrocontrol s.p.a. within and no later than 5 days from the delivery of the order confirmation. The Customer commits to paying for the goods supplied by Hydrocontrol s.p.a., according to the prices indicated on the order confirmation.

Payment conditions

The Parties agree on the payment terms at the beginning of the supply. The terms will be indicated on the order confirmation. Should the Customer be late with the payments, Hydrocontrol S.p.a. will be entitled to require the payment of interests on arrears based on the exiting Prime Rate increased by 2%. Should there be any payment delay, Hydrocontrol s.p.a. will be entitled not to process the Customer's purchase order, even if it has already been confirmed.

Delivery and shipment

The goods are always supplied Ex Works, even when Hydrocontrol s.p.a. agrees with the Customer that the shipment, or a part of it, will be arranged by Hydrocontrol s.p.a. It is agreed that the Customer will bear the risk of goods deterioration or damaging from the moment the goods are handed by Hydrocontrol s.p.a. to the first carrier.

Product characteristics

Hydrocontrol s.p.a. commits to supplying good quality products, compliant with the technical specifications declared on the technical tables and on the catalogue. Hydrocontrol s.p.a., even without notice, at its own discretion, reserves the right to modify the products as necessary, without these changes altering the main characteristics of the products.

Claims

Any claims about defects on delivered products (just as an example: claims about the packaging, the number, the quantity or the external product characteristics) will have to be notified to Hydrocontrol s.p.a. in writing, within and no later than 7 days from reception of the goods, otherwise the claims will be considered as null and void. Occult defects (the defects of the goods that cannot be spotted with a careful control of the goods received by the Customer), will have to be notified in writing to Hydrocontrol s.p.a. within 7 days from the discovery of the defect, and anyhow no later than 12 months from the delivery of the goods, otherwise the claim will be considered as null and void. Even in case of claim or objection, the Customer will never be entitled to suspend or delay the payments to Hydrocontrol s.p.a. for the products subject to claim or objection nor for any other supply.

**GENERAL CONDITIONS AND PATENTS****Warranty**

Should the products supplied by Hydrocontrol not be compliant or have the required quality and should this defect be due to Hydrocontrol, Hydrocontrol s.p.a. commits, at its choice, to replace or repair the faulty products, as long as the defect or lack of compliance is notified to Hydrocontrol s.p.a. in writing, as specified at point 6, within and no later than 18 months from product delivery. On the products that have been fixed or replaced in accordance with what specified above, the above-mentioned warranty applies. The 12 month duration starts from the date of repair or replacement. In case of defects, lack of quality or in case of lack of compliance for the supplied products, with the exception of fraud or serious offence, Hydrocontrol s.p.a. only commits to repairing or replacing the faulty products, according to what specified above. This warranty replaces any other Supplier's warranty or liability established by the law. This warranty excludes any other liability contractual or extra-contractual by Hydrocontrol s.p.a. on the products supplied by Hydrocontrol (as a mere example: damage refund, loss of profit, product recall campaign, etc). Hydrocontrol s.p.a. has signed a product civil liability police, with a suitable maximum coverage.

Ownership retention

The products supplied by Hydrocontrol s.p.a. will be owned by the latter until Hydrocontrol receives the complete payment for the supplied goods.

Obligation confidentiality

Hydrocontrol s.p.a. commits to not disclosing the technical and commercial information it receives from the Customer, unless this information has already been publicly disclosed.

Patents

The Customer is not allowed to use the provided Products, or a part of them, their descriptions or drawings protected or not protected by Patent or registered trademark in order to design or make similar products, unless Hydrocontrol s.p.a. previously issues its written authorization. Should Hydrocontrol s.p.a. give its written authorization, all patents, trademarks, registered designs, copyrights and intellectual property rights related or connected to the Products provided by Hydrocontrol s.p.a. will stay Hydrocontrol's property. The Customer commits to respecting the highest confidentiality.

Applicable law and court of jurisdiction

Hydrocontrol s.p.a.'s supplies are regulated by these General Supply Conditions and, for anything not defined here, by the Italian law. Any controversy related, generated or connected to the supply of Products by Hydrocontrol s.p.a., where Hydrocontrol s.p.a. is involved, will be exclusively dealt with by the Court of Bologna.



NOTES



NOTES



Walvoil worldwide

WALVOIL S.P.A.

DIREZIONE E COORDINAMENTO INTERPUMP GROUP S.P.A.
Headquarters, Subsidiaries and Representative Offices

Walvoil S.p.A. Headquarters

Via Adige, 13/D . 42124 Reggio Emilia . Italy
TEL. +39 0522 932411
info@walvoil.com | www.walvoil.com

AUSTRALASIA

Walvoil Fluid Power Australasia Pty Ltd
13 Vanessa Way . Delahey VIC 3037 . Melbourne . Australia
TEL. +61 458 918 750
australasia@walvoil.com

BRAZIL

Interpump Hydraulics Brasil Ltda | Walvoil Division
Rua Gilberto de Zorzi, 525 . Bairro Forqueta 95115-730
Caxias do Sul (RS)
TEL. +55 54 3289 7000
infobrasil@walvoil.com

CANADA

Walvoil Canada Inc.
3100, Rue Jacob Jordan . Terrebonne . Qc J6X 4J6 . Canada
TEL. +1 450 477 1076 Ext:225
info@walvoilcanada.com | www.walvoilcanada.com

CHINA

Walvoil Fluid Power (Dongguan) Co. Ltd
1st Floor, the Third Factory Area, Sijia, Shijie Town, Dongguan City
Guangdong province, China.
TEL. +86 769 81816189-8020
info@walvoil.com.cn | www.walvoil.com.cn

SOUTH KOREA

Walvoil Fluid Power Korea Ltd.
(17818)80-15, Oseongsandan 1Ro, Oseong-myun, Pyeongtaek-si Gyeonggi-do
Republic of Korea 451-872
TEL. +82 31 682 6030
info@walvoil.co.kr | www.walvoil.co.kr

FRANCE

Walvoil Fluid Power France
362 rue de Bretagne . Vritz . 44540 Vallons-de-l'Erdre
TEL. +33 2 41 94 41 06
france@walvoil.com

INDIA

Walvoil Fluid Power (India) PVT. LTD.
No. 1, 2nd Cross, 2nd Main, KIADB Industrial Area, Attibele, Anekal Taluk
Bangalore - 562107 .
TEL. +91 80 0614 24000
info@walvoil.co.in | www.walvoil.co.in

U.S.A.

Walvoil Fluid Power Corp.
4111 North Garnett Tulsa, OK 74116, USA
TEL. +1 918 858 7100
info@walvoilusa.com | www.walvoilusa.com

Walvoil Fluid Power Corp | Hydrocontrol Business Unit

1109, Technology Drive . Red Wing . MN 55066 . U.S.A.
TEL. +1 651 212 6400
info@walvoilusa.com | www.walvoilusa.com

3rd edition Jan.2024

www.walvoil.com



D1WHEB07E

